

PN16 Y-Strainers

Product Specification:-

- Available Sizes:-25mm to 300mm
- End Connection:- Flanged End
- Installation: - For Flanges drilled as per ANSI B 16.5 FF 150#

Material Specification:-

SR NO.	PART	MOC
1	Body	Cast Iron IS 210 Gr. FG 200
2	Cover	Cast Iron IS 210 Gr. FG 200
3	Screen	SS 304
4	Cover Gasket	CAF
5	Cover Bolts	Carbon Steel
6	Cover Nuts	Carbon Steel

Testing Data:-

Body Test:-Hydraulic at 16 Kg/Cm²


C&R VALVES PVT.LTD,

125, NIRMAN IND.ESTATE, CHINCHOLI,
NEW LINK ROAD, MALAD (WEST),
MUMBAI-400064. MAHARASHTRA-INDIA.


[TEL:--+91-022-28762688/91](tel:+91-022-28762688/91)

Email:-sales@cnrvalves.com

Web:-www.cnrvalves.com

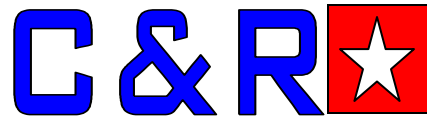

Dimensional Details:-

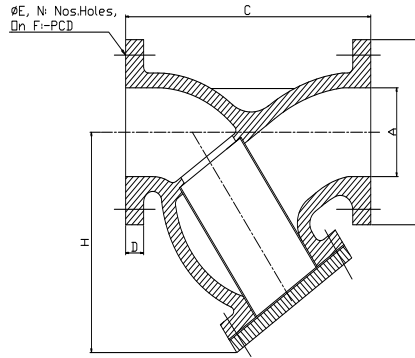

SIZE	A	B	C	D	E	F	H	N
25MM	25	110	127	11.6	15.9	79.4	103	4
40MM	38	125	165	14.7	15.9	98.4	122	4
50MM	51	150	203	16.3	19.5	120.7	140	4
65MM	64	180	216	17.9	19.5	139.7	157	4
80MM	76	190	241	19.5	19.5	152.4	195	4
100MM	102	230	292	24.3	19.5	190.5	225	8
125MM	127	255	356	24.3	22.2	215.9	280	8
150MM	152	280	406	25.9	22.2	241.3	310	8
200MM	203	345	495	29	22.2	298.5	395	8
250MM	254	405	622	30.6	25.4	362	488	12
300MM	305	485	698	32.2	25.4	431.8	548	12

All dimensions are in mm

C&R VALVES PVT.LTD,

125, NIRMAN IND.ESTATE, CHINCHOLI,
NEW LINK ROAD, MALAD (WEST),
MUMBAI-400064. MAHARASHTRA-INDIA.

[TEL:--+91-022-28762688/91](tel:+91-022-28762688/91)

Email:-sales@cnrvalves.com

Web:-www.cnrvalves.com